


FEATURES & BENEFITS:

- **Better sealing with o-ring and gasket**
- **Direct replacement**
- **Fitting for pressure testing**
- **Stronger to handle higher pressure**

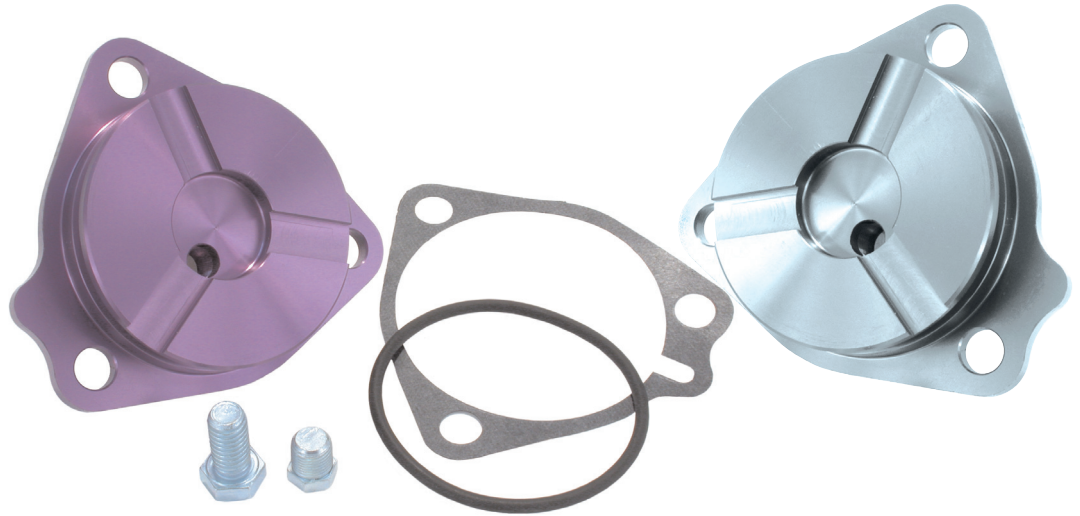

Part No.

28821-03K

- 1 Servo Cover - Purple Anodized
- 1 Pipe Plug
- 3 Hex Head Bolts
- 1 O-Ring
- 1 Gasket

Part No.

28821-04K

- 1 Servo Cover - Purple Anodized
- 1 Pipe Plug
- 3 Hex Head Bolts
- 1 O-Ring
- 1 Gasket
- 1 Servo Piston
- 2 O-Rings

Part No.

28821-05K

- 1 Servo Cover - Purple Anodized
- 1 Pipe Plug
- 3 Hex Head Bolts
- 1 O-Ring
- 1 Gasket
- 1 Servo Piston
- 2 Teflon® Seal Rings

Part No.

28821-06K

- 1 Servo Cover - Non-Anodized
- 1 Pipe Plug
- 3 Hex Head Bolts
- 1 O-Ring
- 1 Gasket

Part No.

28821-07K

- 1 Servo Cover - Non-Anodized
- 1 Pipe Plug
- 3 Hex Head Bolts
- 1 O-Ring
- 1 Gasket
- 1 Servo Piston
- 2 O-Rings

Part No.

28821-08K

- 1 Servo Cover - Non-Anodized
- 1 Pipe Plug
- 3 Hex Head Bolts
- 1 O-Ring
- 1 Gasket
- 1 Servo Piston
- 2 Teflon® Seal Rings

PART SUMMARY

Sonnax servo cover kits **28821-03K** and **28821-06K** are designed to replace other covers and require no modifications to the case. They can be installed with servo piston kits **28821-01K** or **28821-02K**.

Sonnax master servo kits **28821-04K** and **28821-07K** are designed to replace the piston and cover and require no modifications to the case. The kits feature the “no leak” dual o-ring servo using two o-ring seals for superior, positive sealing. In applications with a distorted bore or case flex, o-rings will conform to the bore surfaces, a feature not possible with metal sealing rings. Precise slip fit with apply pin further improves performance.

In addition, Sonnax master servo kits **28821-05K** and **28821-08K** are designed to replace the piston and cover and accept either two Teflon® seal rings or two OEM metal sealing rings. Made with the same high-quality billet aluminum as our dual o-ring servos, these servos will give you the positive apply needed in high pressure racing conditions.