

COMPLAINT

SECONDARY COMPLAINTS

Reduced line pressure, delayed drive/reverse engagement

- Loss of valve body core

CAUSE

Valve and/or bore wear due to linkage side loads and/or extended service life.

CORRECTION

Ream the bore oversize and install the new Sonnax oversized manual valve.

Oversized Manual Valve


68942-16

1 Oversized Manual Valve



F-68942-TL16

1 Reamer
1 Guide Pin
1 Reamer Jig

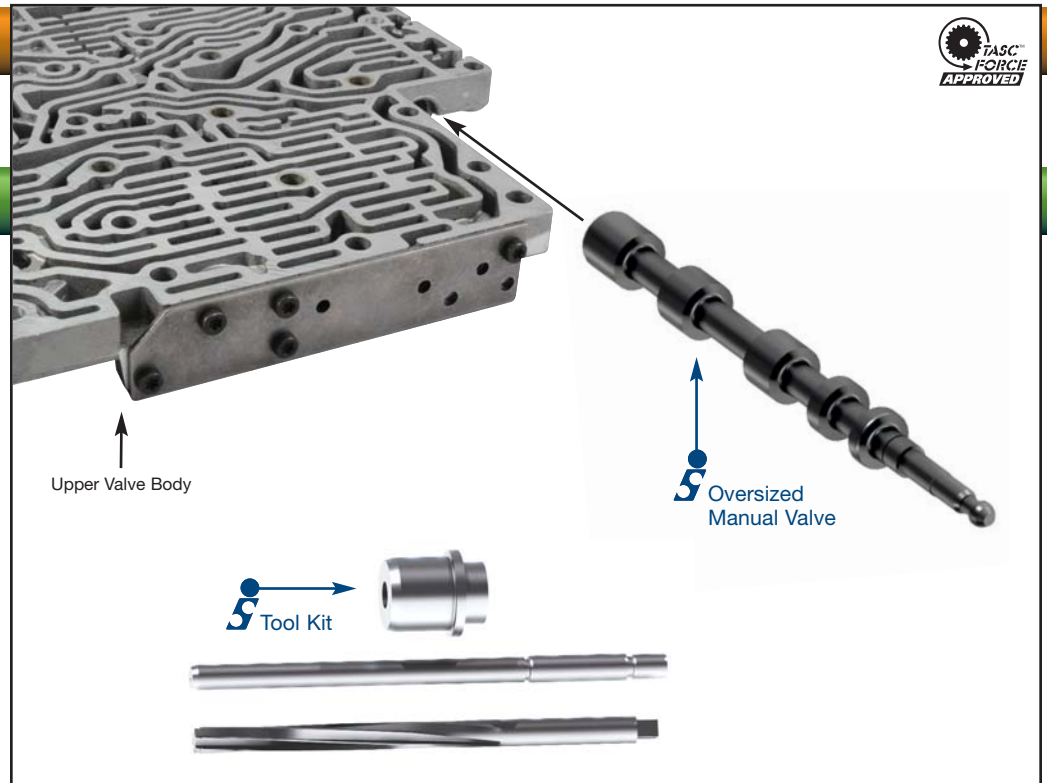

Features & Benefits

- Salvages valuable valve bodies.
- Restores OE manual valve function.
- Simple reaming process keeps work in-shop.

You need this if...

A Vacuum Test in the locations shown, result in leakage. A vacuum test must hold a minimum of 14".

