

COMPLAINT

SECONDARY COMPLAINTS

Burned 3-4 clutch

- Shortened band life • Soft slide shifts

CAUSE

MTV boost loss from insufficient line rise.

CORRECTION

Install the appropriate Sonnax TV boost valve kit.

**“Factory Style”
TV Boost Valve
& Sleeve**

77917-02K .423" diameter

77917-03K .471" diameter

77917-04K .500" diameter

Each includes the following


1 TV Boost Valve

1 TV Boost Sleeve

Also available

K77898A

Reverse Boost Valve Kit

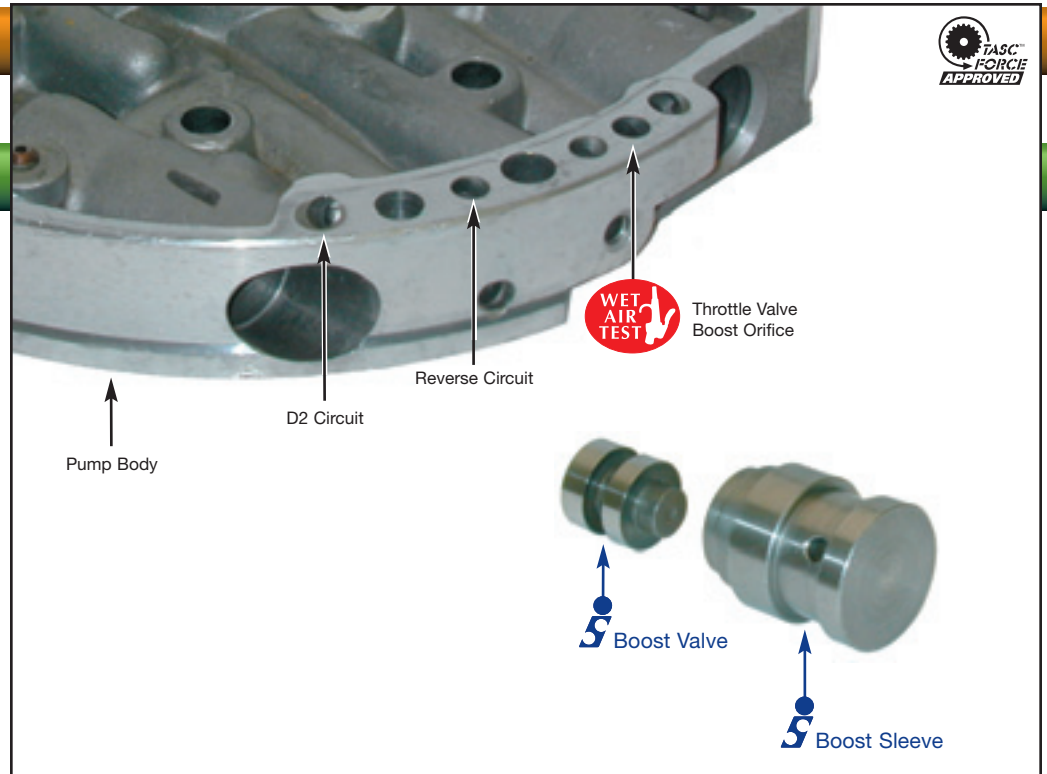

Sonnax Part Summary

A common problem in 700-R4 transmissions is burned bands and/or 3-4 clutches. This failure can be reduced by eliminating throttle boost oil leakage. The Sonnax replacement assemblies 77917-02K, 77917-03K, and 77917-04K eliminate these problems.

Features & Benefits

- TV boost valve and sleeve are manufactured from hardened steel for better wear resistance.
- Kits available in three sizes for .423", .471" and .500" diameters.

