

## COMPLAINT

Worn channel plate sleeve

## CAUSE

Drive sprocket, bearing failure cause channel plate (case cover) sleeve wear.


## CORRECTION

Replace the worn channel plate sleeve with 4T65-E thru-hardened replacement sleeve.

## Channel Plate Sleeve

**84596-01K**  
Channel Plate Sleeve

Also available:  
**8041**  
Channel Plate Sleeve  
for 4T60 & E applications

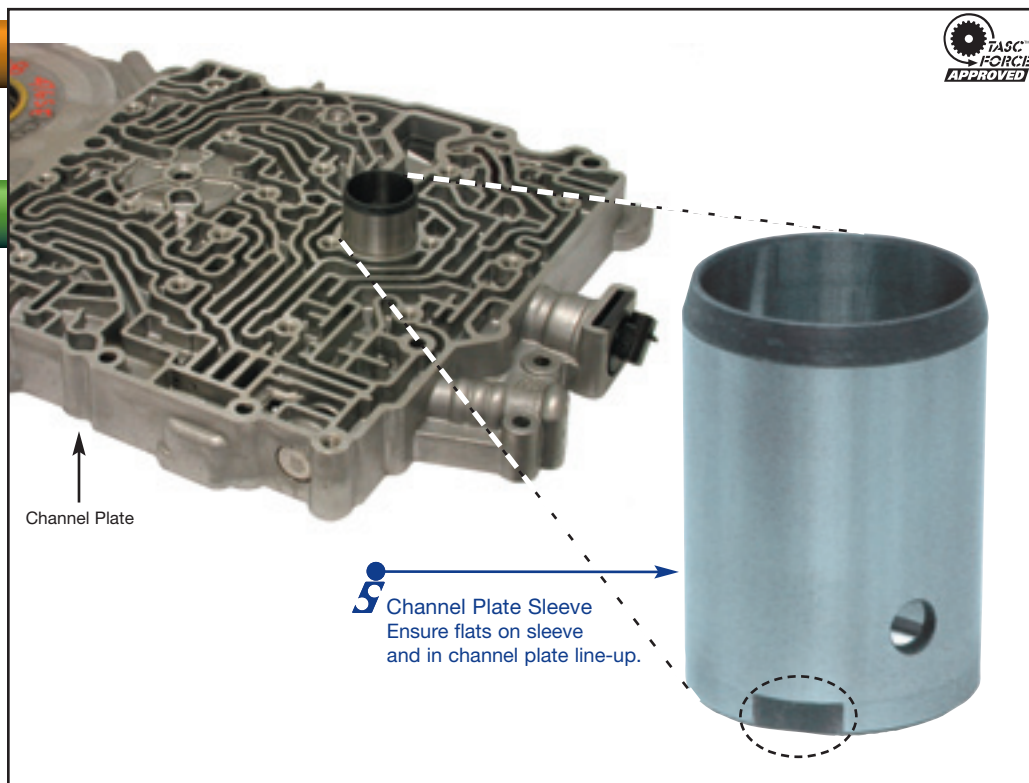

### Sonnax Part Summary

OEM does not service the 4T65-E channel plate sleeve as an individual part. In the past it was necessary to purchase a channel plate (case cover) assembly. Sonnax now offers a replacement thru-hardened sleeve, **84596-01K**.

### Features & Benefits

- Part is not serviced separately by OEM.
- Sleeve is thru-hardened for greater durability.